
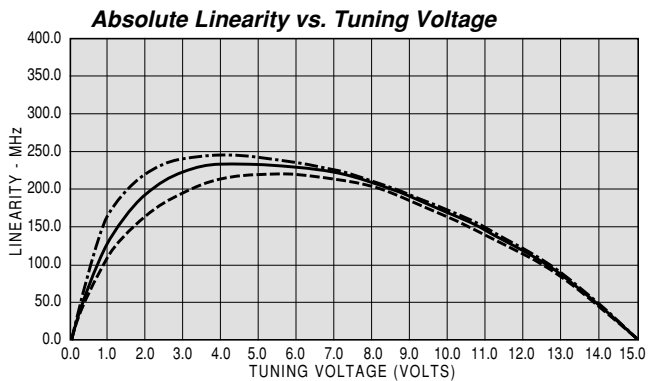
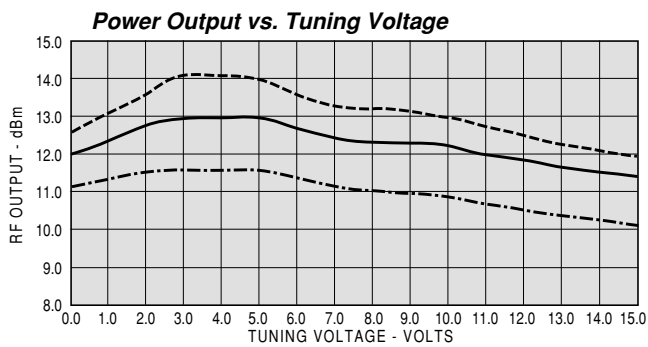
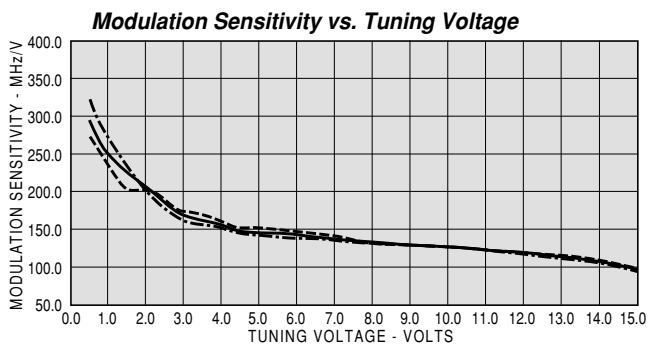


TYPICAL PERFORMANCE

TYPICAL AUTOMATIC TEST DATA

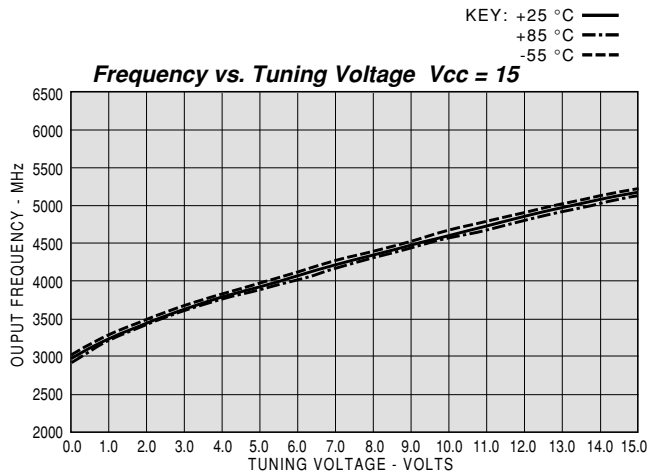

Model: OC4500 Vcc= +15V Vstr mA = 54.94 Vstop mA = 52.60

TUNING VOLTAGE V	FREQ. MHz	POWER dBm	MODULATION SENSITIVITY MHz/V	LINEARITY MHz
0.0	2957.43	12.00	0.00	0.00
0.5	3103.96	12.10	294.56	72.95
1.0	3233.88	12.32	254.36	127.32
1.5	3341.92	12.59	217.66	161.95
2.0	3444.61	12.74	206.62	191.13
2.5	3537.97	12.83	188.05	211.06
3.0	3624.73	12.97	169.94	222.30
3.5	3704.86	12.99	161.68	229.13
4.0	3782.13	12.96	155.67	232.98
4.5	3855.56	13.01	147.57	232.81
5.0	3927.69	12.97	145.42	231.57
5.5	4001.71	12.85	145.08	230.13
6.0	4073.31	12.69	143.84	228.10
6.5	4143.92	12.54	142.08	225.20
7.0	4213.40	12.42	139.52	221.02
7.5	4282.85	12.33	136.17	215.04
8.0	4349.32	12.31	133.74	208.00
8.5	4414.60	12.29	131.34	199.76
9.0	4478.98	12.29	129.55	190.64
9.5	4544.35	12.28	128.13	180.55
10.0	4606.72	12.22	125.79	169.58
10.5	4668.39	12.12	124.07	157.73
11.0	4729.50	11.99	122.82	145.25
11.5	4789.78	11.91	121.44	132.11
12.0	4850.76	11.84	119.56	117.65
12.5	4909.17	11.75	117.51	102.55
13.0	4966.10	11.65	114.56	85.97
13.5	5021.77	11.57	111.79	67.98
14.0	5076.67	11.52	107.65	47.45
14.5	5127.88	11.48	102.98	25.11
15.0	5176.25	11.40	97.36	0.00

