



Teledyne Paradise Datacom's newly packaged High Power Outdoor (H) series of Solid State Power Amplifiers represent the latest in High Power Microwave Amplifier Technology. The SSPA package achieves the highest power density in the industry, along with enhanced maintainability.

A state-of-the-art thermal platform provides efficient cooling for the amplifier module and power supplies. This ensures the highest possible MTBFs for microwave power amplifiers.

Teledyne Paradise Datacom amplifiers are optimized for the best wide band intermod performance and linearity possible.

All Teledyne Paradise Datacom SSPAs have a full complement of local and remote control capability. The remote control capabilities include: RS485 / RS232 serial control, Ethernet including SNMP, UDP, and internal web browsing. Discrete hardware control, Form C contact alarms and opto isolated inputs are also included.

FEATURES

- Extremely High Power Density:
to 500 W C-Band
- RF Output Sample Port
- Remote Communication via RS232 / 485 or Ethernet
- -20 dB Gain Adjustment
- Built-in 1:1 Redundancy Control
- Built-in Maintenance Switch Controller
- Hot/Cold Standby operating modes for reduced power consumption

OPTIONS

- Hand Held Controller
- RF Input Sample Port
- L-Band Input operation
- Reflected Power Monitor
- Phase Combined Systems
- Antenna Mounting Kit

SPECIFICATIONS

- Dimensions & Weight:
16.5 x 27.5 x 9.335 in.
419 x 699 x 238 mm
95.0 lbs. / 43.2 kg



C-Band Output Power Levels

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "A" Frequency selection "B" ¹ Frequency selection "C" ²	5.850 to 6.425 5.850 to 6.725 5.750 to 6.670	GHz GHz GHz
Output Power P_{sat} , typical P_{1dB} , guaranteed minimum	HPAC2400AHXXXXX HPAC2500AHXXXXX	P_{sat} / P_{1dB} 56.0 (400) / 55.0 (316) 57.0 (500) / 56.0 (400)	dBm (W) dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	Power Factor corrected Autoranging HPAC2400AHXXXXX HPAC2500AHXXXXX	> 0.9 47 - 63 2400 (90-265) 2800 (90-265)	Hz W (VAC) W (VAC)

Note 1: De-rate output power by 1.0 dB linearly from 6.425 to 6.725 GHz.

Note 2: De-rate output power by 1.0 dB linearly from 5.850 to 5.750 GHz and by 1.0 dB linearly from 6.425 to 6.670 GHz.

Continuous operation at saturated power can negatively impact the life of the amplifier and will not be covered by warranty. Normal operating output should be limited to P_{1dB} (1dB backed off from the full rated power, P_{sat}).



Common Specifications; HPA_2000XH Series

Electrical Specifications

PARAMETER	NOTES	LIMITS	UNITS
Gain	range	55-75	dB
Gain Flatness	full band	± 1.0	dB
	Extended C-Band units	± 1.5	dB
Gain Slope	per 40 MHz	± 0.3	dB/40 MHz
Gain Variation vs. Temperature	-30 °C to +50 °C	± 1.5	dB
Gain Stability	at constant temperature	± 0.25	dB/24 hours
Gain Adjustment	0.1 dB resolution	20	dB
Intermodulation Distortion	@ P _{1dB} - 3 dB	-25	dBc
AM/PM Conversion	@ rated P _{1dB}	3.5	°/dB
	@P _{1dB} - 3 dB	1.0	°/dB
Spurious Harmonics	@ rated P _{1dB}	-65	dBc
	@ rated P _{1dB} - 3 dB	-50	dBc
Input/Output VSWR	Standard Band units	1.30:1	
	Extended Band units	1.50:1	
Group Delay (per 40 MHz segment)	Linear	0.01	ns/MHz
	Parabolic	0.003	ns/MHz ²
	Ripple	1.0	ns p-p
Noise Output	TX Band	-75	dBW/4 KHz
	RX Band (C-Band)	-150	dBW/4 KHz
Residual AM Noise	0 - 10 KHz	-45	dBc
	10 KHz - 500 KHz	-20 (1.25 + log F)	dBc
	500 KHz - 1 MHz	-80	dBc
Phase Noise	Offset frequency from carrier		
	10 Hz	-90	dBc/Hz
	100 Hz	-100	dBc/Hz
	1 KHz	-110	dBc/Hz
	10 KHz	-120	dBc/Hz
	100 KHz	-125	dBc/Hz
	1 MHz	-130	dBc/Hz

Mechanical Specifications

Size	width X height X depth	21.0 X 27.95 X 13.5 533 X 710 X 343	inches mm
Weight	typical	95 ± 5 (43.2 ± 2)	lbs. (kg)
Finish		powder coat	white

Environmental Specifications

Operating Temperature	Ambient	-40 to +60	°C
Relative Humidity	Condensing	100	%
Cooling System	Integrated	Forced air	
Ingress Protection Rating	With connectors properly sealed	IP54	
Altitude	No temperature de-rating up to 10,000 ft. (3,000 m) De-rate maximum temperature by 2 °C per 1,000 ft (300 m) beyond 10,000 ft.		
Shock	50 g p-p, 11 msec pulses		
Vibration	3g rms 30 min. 5-2000 Hz		

Specifications are subject to change without notice.

L-Band Operation

Teledyne Paradise Datacom amplifiers are available with an integrated L-Band Block Up Converter. L-Band units utilize Teledyne Paradise Datacom's proprietary zBUC technology. The addition of a zBUC® converter to the SSPA typically increases the gain by 2-4 dB. The advantages of zBUC technology include:

- Autosensing zBUC includes an internal reference but will switch to an external reference if applied;
- Internal high stability (10 MHz) reference; will lock to externally supplied (10 or 50 MHz) reference;
- zBUC converter can accept a wide range of external reference power (-10 to +5 dBm);
- zBUC converter can accept FSK monitor and control signal via the IFL for complete amplifier remote control.

Available Frequency Plans


Band	Frequency Plan	IF Input	LO Frequency	RF Output
C	Sub-Band "A"	950 - 1525 MHz	4.900 GHz	5.850 - 6.425 GHz
C	Sub-Band "B"	950 - 1825 MHz	4.900 GHz	5.850 - 6.725 GHz
C	Sub-Band "C"	950 - 1870 MHz	4.800 GHz	5.750 - 6.670 GHz

Electrical Specifications for High Power Outdoor SSPA with ZBUC converter

PARAMETER	NOTES	LIMITS		UNITS
Gain	Nominal setting	75		dB
Gain Flatness	full band (C-,X-bands)	± 2.0		dB
Gain Slope	per 40 MHz (C-,X-bands)	± 0.5		dB/40 MHz
Gain Adjusted Range		20		dB
Gain Stability	Typical C-Band Adj. Range -40 to +60 °C	60 - 80 ± 1.5		dB dB
Phase Noise	Offset frequency from carrier	<u>Absolute max.</u>	<u>C-band (typ.)</u>	
	10 Hz	-30	-60	dBc/Hz
	100 Hz	-60	-74	dBc/Hz
	1 KHz	-70	-84	dBc/Hz
	10 KHz	-80	-100	dBc/Hz
	100 KHz	-90	-105	dBc/Hz
	1 MHz	-90	-125	dBc/Hz
Spurious	In-Band Signal Related (C-Band) (Extended C-Band)	-50		dBc
	Close to Carrier Spurious (≤ 20 MHz)	-40		dBc
	Local Oscillator	-50		dBc
		-30		dBm
Transmit Band Noise Output Power Density	Tx Band at Maximum gain	-65		dBW/4kHz
Input VSWR	L-Band	1.5 : 1		
Internal Reference Option	Reference Accuracy (initial)	± 1 • 10 ⁻⁸		
	Aging per day (after 30 days)	± 1 • 10 ⁻⁹		
	Aging per year (after 30 days)	± 6 • 10 ⁻⁸		
	Reference Stability over Temperature (-40 to +40 °C, ambient)	± 1 • 10 ⁻⁸		



Outline Drawing, C-Band High Power Outdoor SSPA (typical)

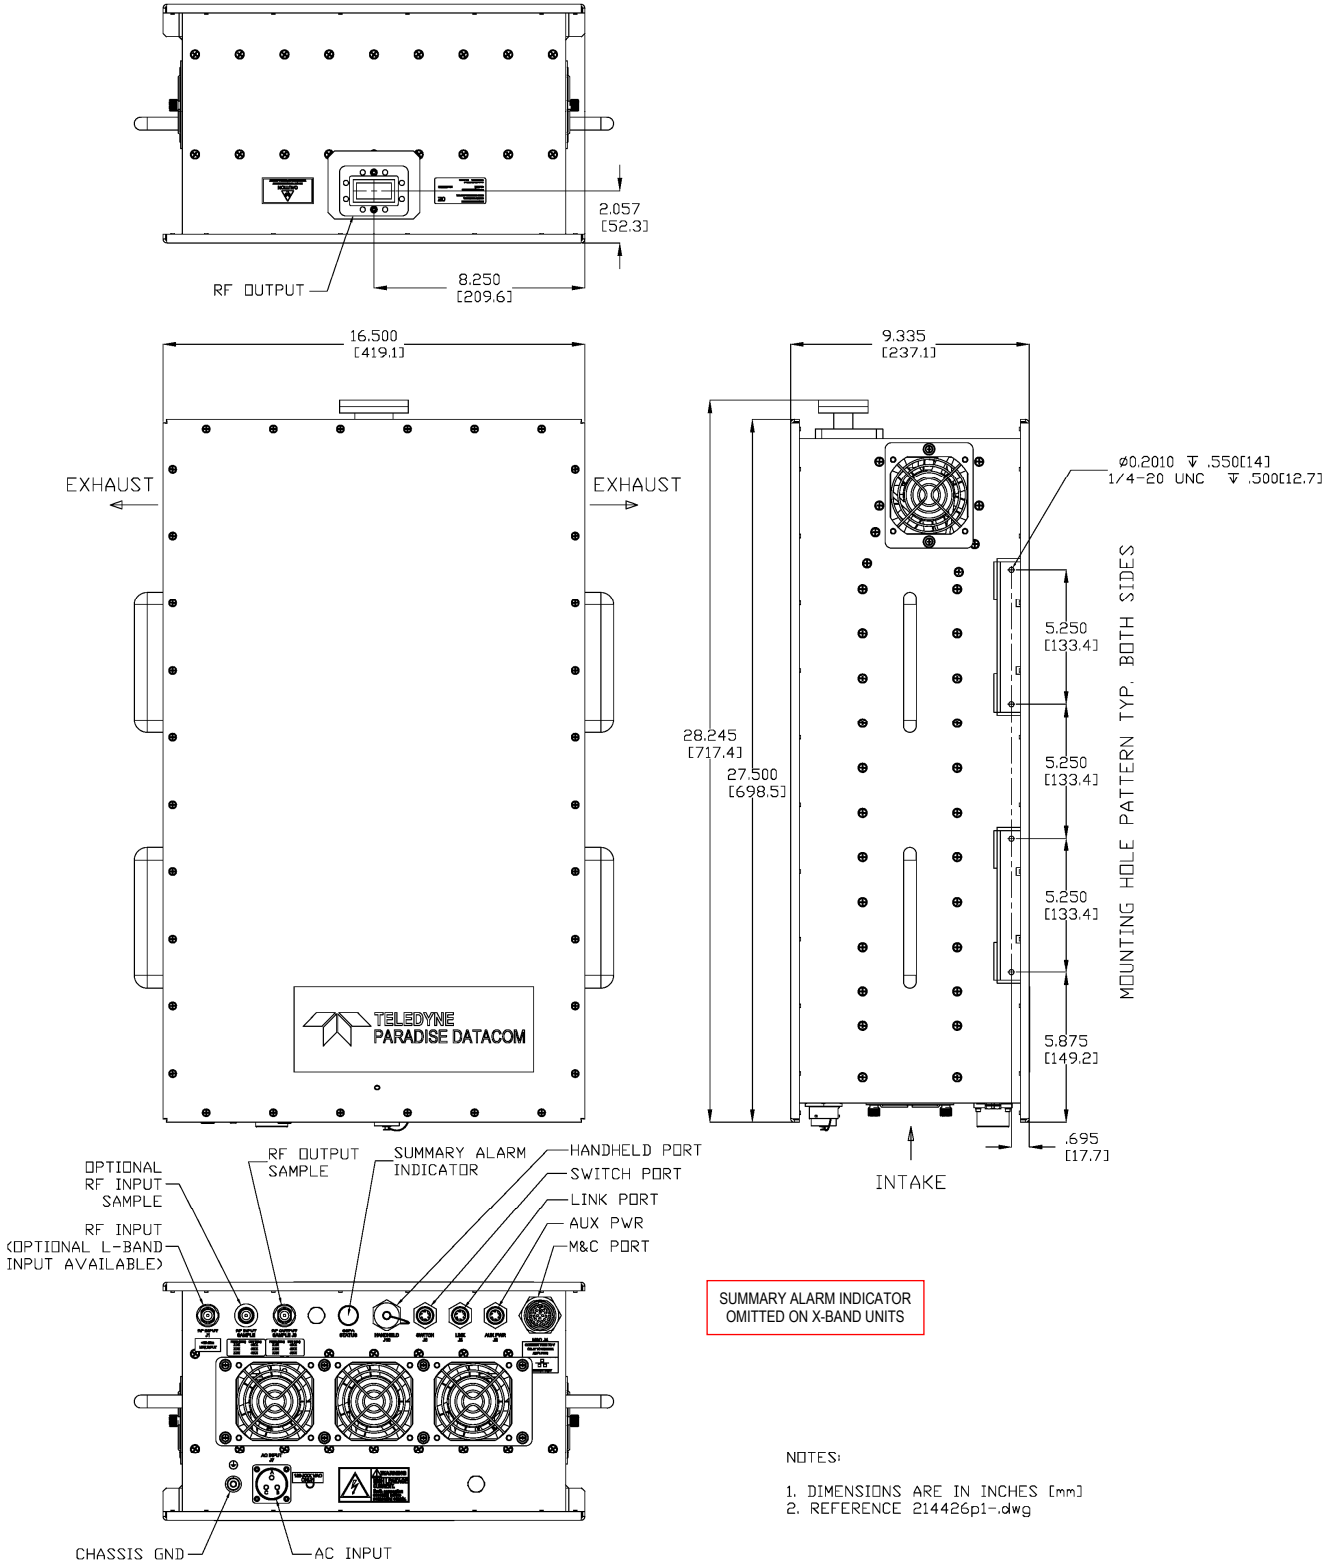



Optional Accessories

Universal Handheld Controller (RCH-1000)

The Universal Handheld Controller (RCH-1000) is a versatile device used to interface with a variety of Teledyne Paradise Datacom amplifiers, including Compact Outdoor SSPA, or H-Series High Power Outdoor SSPA. Reference specification sheet **211667**.

The device is housed in a ruggedized enclosure that is environmentally sealed to IP65 levels. This allows the Universal Handheld Controller (RCH-1000) to be used in most outdoor environments. The rugged construction of the device enclosure provides protection from impact and vibration.



This device allows the operator to adjust the attenuation of the connected unit, and control the mute/unmute selection, as well as monitor the status, conditions and settings of the connected unit via a serial RS-485 connection. Fault conditions and other events are tracked in the controller's internal log.

Remote Control Panel (RCP2-1000)



The RCP2-1000 is a Remote Control Panel for the High Power Outdoor SSPA. It requires only 1RU of cabinet space and provides an identical local interface as exists on Teledyne Paradise Datacom Indoor Rack Mount amplifiers.

The controller communicates with the outdoor amplifier via a RS485 link. The controller then provides a wide range of interface capability including Ethernet communications. The following communication links are available at the Remote Control Panel:

- RS232 or Addressable RS485 Serial Data
- Discrete (Parallel) Interface - Form C contact outputs & Opto Isolated Inputs
- Ethernet Interface - A full compliment of Ethernet communications including UDP, SNMP, and an internal web browser
- Local (Manual) interface via front panel LCD display

Part Number Configuration Matrix

HPA **C** **2** **4** **0** **0** **A** **H** **M** **X** **S** **X** **X**

Band	
C-Band	C

Generation	
Second	2

Power Level (Watts)	
C-Band	400, 500

Frequency Sub Band	
C-Band	
A ¹	5.850 to 6.425 GHz
B ¹	5.850 to 6.725 GHz
C ¹	5.750 to 6.670 GHz

¹ Available with optional BUC

Configuration Modifier 3	
X	None (Standard)

Configuration Modifier 2	
X	Standard
V	Reflected Power Monitor

Configuration Modifier 1	
X	Standard
S	Input Sample Port

System Configuration	
X	Standalone amplifier

Block Up Converter	
M	Autosensing BUC
X	No BUC

Package	
H	Standalone amplifier

Example - A standalone 400W GaAs C-Band High Power Outdoor SSPA an optional input sample port and optional internal reference block up converter is part number: **HPAC2400AHMXSXX**.

An optional mounting kit is available.

COMMENTS:



Global Sales Offices

U.S., Canada, Latin America

Teledyne Paradise Datacom
11361 Sunrise Park Drive
Rancho Cordova, CA 95742
Tel: +1 (814) 954-6163
sales@paradisedata.com

Eastern Regional Sales Office

(Eastern U.S. & Latin America)
RF Inquiries: John O'Grady, (848) 220-6464
Modem Inquiries: Mike Towner, (470) 509-9941
sales@paradisedata.com

Western Regional Sales Office

(Western U.S. & Canada)
Bruce Grieser
Cell: +1 (480) 444-9676
sales@paradisedata.com

U.K. Office

Europe, Middle East, Africa
Teledyne Paradise Datacom
106 Waterhouse Lane,
Chelmsford, Essex, England, CM1 2QU
Tel: +44(0)1245 847520
Tel: +44(0)1376 515636
sales@paradisedata.com

Asia Pacific

Tavechai Mektavepong
Teledyne Paradise Datacom Thailand Office
333, 20 C1 Fl., Lao Peng Nguan Tower 1,
Vibhavadi-Rangsit Rd.,
Chomphol, Chatuchak,
Bangkok 10900
Thailand

Tel: +66 2-272-2996
Fax: +66 2-272-2997
sales@paradisedata.com

Beijing, China

Teledyne Paradise Datacom Representative Office
Room 204, No.1 Building,
No.9 Jiuxianqiao East Road,
Chaoyang District,
Beijing, China 100016

Tel: +86 13601251528
sales@paradisedata.com

Use and Disclosure of Data: This product is classified as EAR99 and is subject to U.S. Department of Commerce regulations. Export, reexport or diversion contrary to U.S. law is prohibited.

Proprietary and Confidential: The information contained in this document is the sole property of Teledyne Paradise Datacom. Any reproduction in part or as a whole without the written permission of Teledyne Paradise Datacom is prohibited.

Data Security: Teledyne Paradise Datacom amplifiers and controllers do not inherently provide encryption to transmitted data, and have limited security measures to protect it. If the unit will be accessible over the Internet, exercise appropriate data security protocols. Teledyne Paradise Datacom strongly recommends placing the equipment behind a protective Firewall or setting up a VPN link with dual authentication for remote access.

Specifications are subject to change without notice.