

Compact Outdoor Gallium Nitride (GaN) Solid State Power Amplifiers



400W C-Band GaN
 Compact Outdoor SSPA

Description

The Teledyne Paradise Datacom Compact Outdoor Solid State Power Amplifier (SSPA) is built for extreme environmental conditions and high reliability operation. Along with the robust construction exists the highest power density in the industry. This allows solid state technology to be used in applications that have long been reserved for TWTAs. Weighing 44 lbs. (20 kg) and being only slightly larger than a shoe box, these SSPAs are available in output power levels of:


L-Band: 100W, 200W, 300W, 400W, 500W

S-Band: 100W, 200W, 300W, 400W, 500W


C-Band: 300W, 400W

X-Band: 300W, 400W

Ku-Band: 200W, 250W

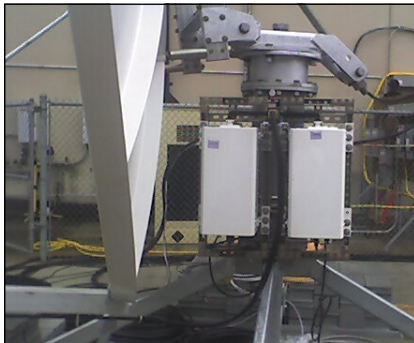

Antenna-mount 1:1 system w/ mounting frame

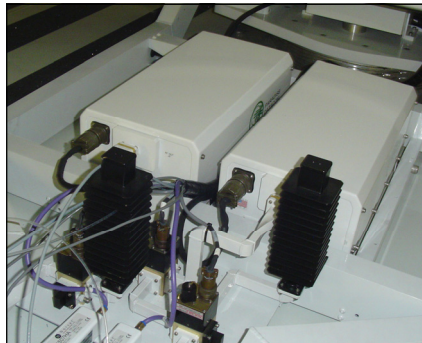

SNG-mount 1:1 system w/ side-mount AC input

FEATURES

- Compact size and weight
- CE & MIL-461 Compliant
- Integrated forced-air cooling system
- 20 dB RF Gain Adjustment
- Extreme Environmental Testing
- RF Output Sample Port
- Maintenance Free Operation
- Universal, Power Factor Corrected Power Supply
- Built-in 1:1 Redundancy Control
- Built-in Maintenance Switch Controller
- True Output Power Detection
- Hot/Cold Standby operating modes for reduced power consumption

OPTIONS

- Hand Held Controller
- Antenna Mounting Kit
- Remote Control Panel
- L-Band Input
- FSK monitor & control via IFL
- Phase Combined Systems
- Low line voltage operation
- Optional side-mount AC input for SNG installations
- Receive Band Reject Filter
- Reflected Power Monitor
- -55 °C Operation

SPECIFICATIONS

- Compact Outdoor housing
 10.0 X 19.5 X 6.50 in
 254 X 495 X 165 mm
 44.0 lbs. / 20.0 kg
- White powder coat finish
- Operating temperature:
 -40 to +60 °C

Specifications, L-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "A"	1.750 to 1.850	GHz
Output Power Typical, P_{sat} Guaranteed minimum, P_{Linear}^1	HPAL2100ACXXXXXG HPAL2200ACXXXXXG HPAL2300ACXXXXXG HPAL2400ACXXXXXG HPAL2500ACXXXXXG	P_{sat} / P_{Linear} 50.0 (100) / 47.0 (50) 53.0 (200) / 50.0 (100) 54.8 (300) / 51.8 (150) 56.0 (400) / 53.0 (200) 57.0 (500) / 54.0 (250)	dBm (W) dBm (W) dBm (W) dBm (W) dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor HPAL2100ACXXXXXG HPAL2200ACXXXXXG HPAL2300ACXXXXXG HPAL2400ACXXXXXG HPAL2500ACXXXXXG	.98 47 to 63 500 / 400 (90-265) 800 / 700 (90-265) 1300 / 1000 (90-265) 1600 / 1300 (90-265) 1800 / 1500 (90-265)	Hz W (VAC) W (VAC) W (VAC) W (VAC) W (VAC)
Receive Band Noise Power Density	without optional filter with optional filter	- 95 - 155	dBW / 4 KHz dBW / 4 KHz

Specifications, S-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "G" Frequency selection "A" Frequency selection "B"	1.750 to 2.120 ² 2.020 to 2.120 2.200 to 2.300	GHz GHz GHz
Output Power Typical, P_{sat} Guaranteed minimum, P_{Linear}^1	HPAS2100ACXXXXXG HPAS2200ACXXXXXG HPAS2300ACXXXXXG HPAS2400ACXXXXXG HPAS2500ACXXXXXG	P_{sat} / P_{Linear} 50.0 (100) / 47.0 (50) 53.0 (200) / 50.0 (100) 54.8 (300) / 51.8 (150) 56.0 (400) / 53.0 (200) 57.0 (500) / 54.0 (250)	dBm (W) dBm (W) dBm (W) dBm (W) dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor HPAS2100ACXXXXXG HPAS2200ACXXXXXG HPAS2300ACXXXXXG HPAS2400ACXXXXXG HPAS2500ACXXXXXG	.98 47 to 63 500 / 400 (90-265) 800 / 700 (90-265) 1300 / 1000 (90-265) 1600 / 1300 (90-265) 1800 / 1500 (90-265)	Hz W (VAC) W (VAC) W (VAC) W (VAC) W (VAC)
Receive Band Noise Power Density	without optional filter with optional filter	- 95 - 155	dBW / 4 KHz dBW / 4 KHz

Notes

- Note 1:** P_{Linear} is the linear power as defined by MIL-STD-188-164 for two tones separated by 5 MHz or ≤ -30 dBc spectral regrowth on a single OQPSK signal at 1.0x symbol rate.
Note 2: Not available at 500W.

Specifications, C-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "A" ³ Frequency selection "B" ³ Frequency selection "C" ⁴	5.850 to 6.425 5.850 to 6.725 5.750 to 6.670	GHz GHz GHz
Output Power Typical, P _{sat} Guaranteed minimum, P _{Linear} ¹	HPAC2300ACXXXXXG HPAC2400ACXXXXXG	$\frac{P_{sat}}{P_{Linear}}$ 54.8 (300) / 51.8 (150) 56.0 (400) / 53.0 (200)	dBm (W) dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor HPAC2300ACXXXXXG HPAC2400ACXXXXXG	.98 47 to 63 $\frac{P_{sat}}{P_{Linear}}$ 1500 / 1300 (180-265) ² 1800 / 1600 (180-265) ²	Hz W (VAC) W (VAC)
Receive Band Noise Power Density	without filter	- 155	dBW / 4 KHz

Note 1: P_{linear} is the linear power as defined by MIL-STD-188-164 for two tones separated by 5 MHz or ≤ -30 dBc spectral regrowth on a single OQPSK signal at 1.0x symbol rate.

Note 2: Available with low line voltage option, 90 to 265 VAC.

Note 3: De-rate output power by 1.0 dB linearly from 6.425 to 6.725 GHz.

Note 4: De-rate output power by 1.0 dB linearly from 5.850 to 5.750 GHz and by 1.0 dB linearly from 6.425 to 6.670 GHz.

Specifications, X-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "A"	7.90 to 8.40	GHz
Output Power Typical, P _{sat} Guaranteed minimum, P _{Linear} ¹	HPAX2300ACXXXXXG HPAX2400ACXXXXXG	$\frac{P_{sat}}{P_{Linear}}$ 54.8 (300) / 51.8 (150) 56.0 (400) / 53.0 (200)	dBm (W) dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor HPAX2300ACXXXXXG HPAX2400ACXXXXXG	.98 47 to 63 $\frac{P_{sat}}{P_{Linear}}$ 1500 / 1300 (180-265) ² 2000 / 1700 (180-265) ²	Hz W (VAC) W (VAC)
Receive Band Noise Power Density	without optional filter with optional filter	- 85 - 155	dBW / 4 KHz dBW / 4 KHz

Note 1: P_{linear} is the linear power as defined by MIL-STD-188-164 for two tones separated by 5 MHz or ≤ -30 dBc spectral regrowth on a single OQPSK signal at 1.0x symbol rate.

Note 2: Available with low line voltage option, 90 to 265 VAC.

Specifications, Ku-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "A" Frequency selection "B" ³	14.00 to 14.50 13.75 to 14.50	GHz GHz
Output Power Typical, P _{sat} Guaranteed minimum, P _{Linear} ¹	HPAK2200ACXXXXXG HPAK2250ACXXXXXG	$\frac{P_{sat}}{P_{Linear}}$ 53.0 (200) / 50.0 (100) 54.0 (250) / 51.0 (125)	dBm (W) dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor HPAK2200ACXXXXXG HPAK2250ACXXXXXG	.98 47 to 63 $\frac{P_{sat}}{P_{Linear}}$ 1200 / 920 (180-265) ² 1500 / 1000 (180-265) ²	Hz W (VAC) W (VAC)
Receive Band Noise Power Density ⁴		- 155	dBW / 4 KHz

Note 1: P_{linear} is the linear power as defined by MIL-STD-188-164 for two tones separated by 5 MHz or ≤ -30 dBc spectral regrowth on a single OQPSK signal at 1.0x symbol rate.

Note 2: Available with low line voltage option, 90 to 265 VAC.

Note 3: De-rate output power by 1.0 dB linearly from 14.00 to 13.75 GHz.

Note 4: All Ku-Band SSPAs are fitted with a receive band reject bulkhead filter, standard. An optional pressure window is available.

Common Electrical Specifications

PARAMETER	NOTES	LIMITS	UNITS
Gain	range	55-75	dB
Gain Flatness	full band	± 1.0	dB
	full band (Extended C-Band)	± 1.5	dB
	full band (L-/S-Band)	± 0.75	dB
Gain Slope	per 40 MHz	± 0.3	dB/40 MHz
	per 10 MHz (L-/S-Band)	± 0.3	dB/10 MHz
Gain Variation vs. Temperature	-30 °C to +50 °C	± 1.5	dB
Gain Stability	at constant temperature	± 0.25	dB/24 hours
Gain Adjustment	0.1 dB resolution	20	dB
Intermodulation Distortion (Two-tone, 5 MHz spacing)	At P _{Linear} (P _{sat} - 3 dB)	-25	dBc
AM/PM Conversion	@ rated P _{Linear}	≤ 1.0	°/dB
Spurious Harmonics (SSPA only)	@ rated P _{Linear}	-65	dBc
	@ rated P _{Linear}	-50	dBc
	@ rated P _{Linear} (L-/S-Band)	-30	dBc
Input/Output VSWR	Extended C-Band	1.30:1	
	Output VSWR: Ku-Band with bulkhead filter	1.50:1	
		1.40:1	
Noise Figure	at maximum gain	10	dB
	at maximum gain (L-/S-Band)	8	dB
Group Delay (per 40 MHz segment)	Linear	0.01	ns/MHz
	Parabolic	0.003	ns/MHz ²
	Ripple	1.0	ns p-p
Transmit Band Noise Output Power Density	TX Band	-75	dBW/4 KHz
Residual AM Noise, typical	Offset frequency from carrier		
	1 Hz	-110	dBc/Hz
	10 Hz	-120	dBc/Hz
	100 Hz	-130	dBc/Hz
	1 KHz	-135	dBc/Hz
	10 KHz	-140	dBc/Hz
	100 KHz	-140	dBc/Hz
	1 MHz	-140	dBc/Hz
Residual Phase Noise, typical (SSPA only)	Offset frequency from carrier		
	10 Hz	-90	dBc/Hz
	100 Hz	-100	dBc/Hz
	1 KHz	-110	dBc/Hz
	10 KHz	-120	dBc/Hz
	100 KHz	-125	dBc/Hz
	1 MHz	-130	dBc/Hz
True RF Power Detector	Range	P _{sat} to (P _{sat} - 20)	dB
	Accuracy, Psat to (Psat - 10 dB)	± 0.75	dB
	Accuracy, (Psat - 10 dB) to (Psat - 20 dB)	± 1.0	dB
	L-/S-Band units, Accuracy (full band)	± 1.0	dB

Specifications are subject to change without notice.

L-Band Operation

Teledyne Paradise Datacom amplifiers are available with an integrated L-Band Block Up Converter. L-Band units utilize Teledyne Paradise Datacom's proprietary zBUC technology. Adding a zBUC[®] converter typically increases the gain by 2-4 dB. Advantages include:

- zBUC converter can detect and switch to an externally supplied reference.
- Optional internal high stability (10MHz) reference.
- zBUC converter can lock to an externally supplied reference of 10 or 50 MHz.
- zBUC converter can accept a wide range of external reference power (-10 to +5 dBm).
- zBUC converter can accept FSK monitor and control signal via the IFL for complete amplifier remote control.

Available Frequency Plans

Band	Frequency Plan	IF Input	LO Frequency	RF Output
C	Sub-Band "A"	950 - 1525 MHz	4.900 GHz	5.850 - 6.425 GHz
C	Sub-Band "B"	950 - 1825 MHz	4.900 GHz	5.850 - 6.725 GHz
C	Sub-Band "C"	950 - 1870 MHz	4.800 GHz	5.750 - 6.670 GHz
X	Sub-Band "A"	950 - 1450 MHz	6.950 GHz	7.900 - 8.400 GHz
Ku	Sub-Band "A"	950 - 1450 MHz	13.050 GHz	14.00 - 14.50 GHz
Ku	Sub-Band "B"	950 - 1700 MHz	12.800 GHz	13.75 - 14.50 GHz


Electrical Specifications for Compact Outdoor SSPA with ZBUC converter

PARAMETER	NOTES	LIMITS				UNITS
Gain	Nominal setting	75				dB
Gain Flatness	full band	± 2.0				dB
Gain Slope	per 40 MHz	± 0.5				dB/40 MHz
Gain Adjusted Range		20				dB
	Typical C-Band Adj. Range	60 - 80				dB
	Typical Ku-Band Adj. Range	57 - 77				dB
Gain Stability	-40 to +60 °C	± 1.5				dB
Phase Noise	Offset frequency from carrier	<u>Absolute max.</u>	<u>C-band (typ.)</u>	<u>X-band (typ.)</u>	<u>Ku-band (typ.)</u>	
	10 Hz	-30	-60	-58	-56	dBc/Hz
	100 Hz	-60	-74	-70	-67	dBc/Hz
	1 KHz	-70	-84	-80	-78	dBc/Hz
	10 KHz	-80	-100	-94	-91	dBc/Hz
	100 KHz	-90	-105	-97	-94	dBc/Hz
	1 MHz	-90	-125	-122	-120	dBc/Hz
Spurious	In-Band Signal Related (Extended C-Band)	-50				dBc
	Close to Carrier Spurious (≤ 20 MHz)	-40				dBc
	Local Oscillator	-50				dBc
		-30				dBm
Noise Figure	At Maximum gain	20				dB
Transmit Band Noise Output Power Density	Tx Band at Maximum gain	-65				dBW/4kHz
Input VSWR	L-Band	1.5 : 1 (13.9)				(dB)
Internal Reference Option	Reference Accuracy (initial)	± 1 • 10 ⁻⁸				
	Aging per day (after 30 days)	± 1 • 10 ⁻⁹				
	Aging per year (after 30 days)	± 6 • 10 ⁻⁸				
	Reference Stability over Temp. (-40 to +40 °C, ambient)	± 1 • 10 ⁻⁸				

Outline Drawing, Compact Outdoor SSPA (typical)

NOTES:

1. ALL DIMENSIONS ARE IN INCHES (mm).
2. REFERENCE 212703PH.DWG

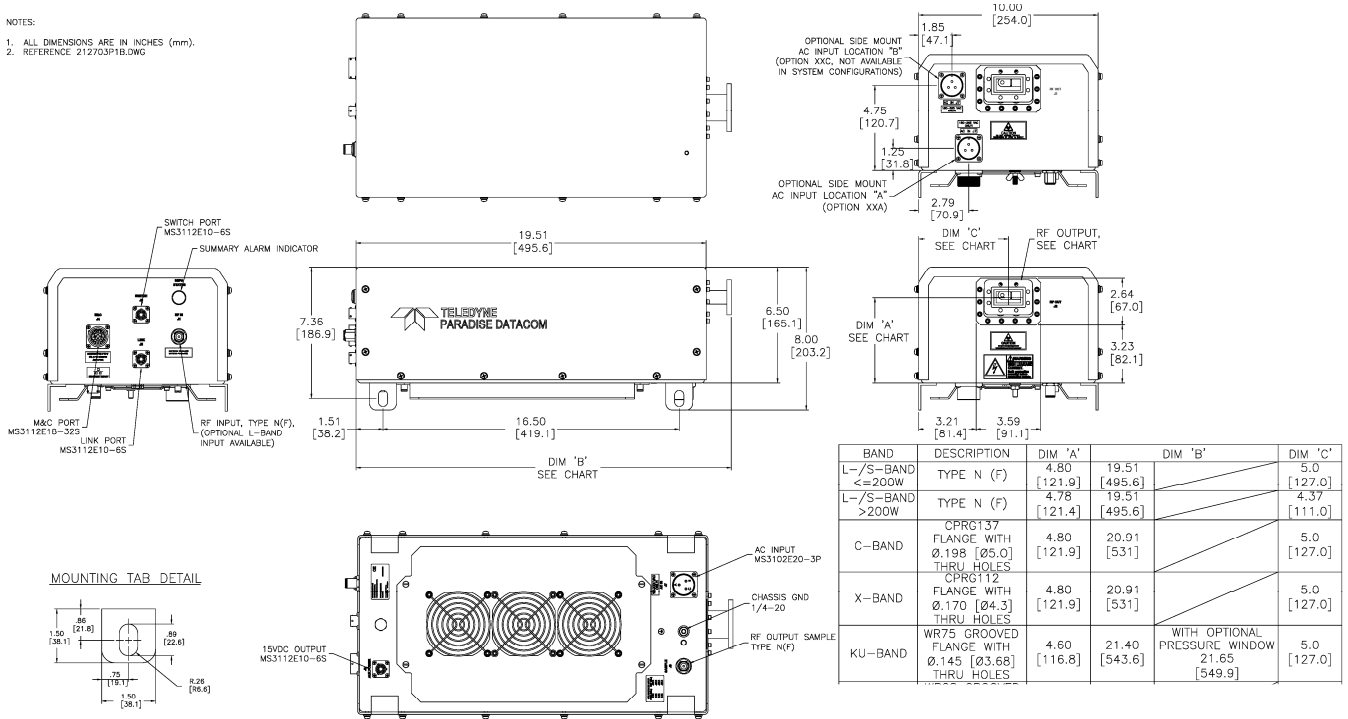

BAND	DESCRIPTION	DIM 'A'	DIM 'B'	DIM 'C'
L-/S-BAND ≤200W	TYPE N (F)	4.80 [121.9]	19.51 [495.6]	5.0 [127.0]
L-/S-BAND >200W	TYPE N (F)	4.78 [121.4]	19.51 [495.6]	4.37 [111.0]
C-BAND	CPRG137 FLANGE WITH Ø.198 [Ø5.0] THRU HOLES CPRG112	4.80 [121.9]	20.91 [531]	5.0 [127.0]
X-BAND	FLANGE WITH Ø.170 [Ø4.3] THRU HOLES	4.80 [121.9]	20.91 [531]	5.0 [127.0]
KU-BAND	WR75 GROOVED FLANGE WITH Ø.145 [Ø3.68] THRU HOLES	4.60 [116.8]	21.40 [543.6]	WITH OPTIONAL PRESSURE WINDOW 21.65 [549.9]

Mechanical Specifications

PARAMETER	NOTES	LIMITS	UNITS
Size	width X length X height	10.0 X 19.5 X 6.5 254 X 495 X 165	inches mm
Weight	Base Unit With Internal zBUC	44 (20.0) ± 3% +1.7 (+0.8)	lbs.(kg) lbs.(kg)
Finish		Paint	White; powder coat
Connectors	RF/L-Band Input RF Output (L-/S-Band) RF Output (C-Band) RF Output (X-Band) RF Output (Ku-Band) RF Output Sample Line Power Monitor and Control Link Port Redundancy Switch Auxiliary +15VDC LNB Power (500 mA)	Type N Type N WR137 Waveguide WR112 Waveguide WR75 Waveguide Type N 3-pin MS-type 32-pin MS-type 6-pin MS type 6-pin MS-type 6-pin MS-type	Female Female CPR137G flange (PDR-70) CPR112G flange (PDR-84) Grooved flange Female Plug Socket Socket Socket Socket

Environmental Specifications

PARAMETER	NOTES	LIMITS	UNITS
Operating Temperature	Ambient	-40 to +60	°C
Relative Humidity	Condensing	100	%
Cooling System	Integrated, Forced air	103	CFM
Ingress Protection Rating	With connectors properly sealed	IP 54	
Audible Noise	Measured 1m from unit, at P _{sat}	74.0	dBA
Altitude	No temperature de-rating up to 10,000 ft. (3,000 m) De-rate maximum temperature by 2 °C per 1,000 ft (300 m) beyond 10,000 ft.		
Shock	50 g p-p, 11 msec pulses		
Vibration	3g rms 30 min. 5-2000 Hz		

Optional Accessory

Universal Handheld Controller (RCH-1000)

The Universal Handheld Controller (RCH-1000) is a versatile device used to interface with a variety of Teledyne Paradise Datacom amplifiers, including Compact Outdoor or H-Series High Power Outdoor SSPAs. Reference specification sheet **211667**.

The device is housed in a ruggedized enclosure that is environmentally sealed to IP65 levels. This allows the Universal Handheld Controller (RCH-1000) to be used in most outdoor environments. The rugged construction of the device enclosure provides protection from impact and vibration.



This device allows the operator to adjust the attenuation of the connected unit, and control the mute/unmute selection, as well as monitor the status, conditions and settings of the connected unit via a serial RS-485 connection. Fault conditions and other events are tracked in the controller's internal log.

Compact Outdoor Gallium Nitride (GaN) Solid State Power Amplifiers

Part Number Configuration Matrix

HPA **C** **2** **4** **0** **0** **A** **C** **M** **X** **X** **X** **X** **G**

Band	
L-Band	L
S-Band	S
C-Band	C
X-Band	X
Ku-Band	K

Generation	
Second	2

Power Level (Watts)	
L-Band	100, 200, 300, 400, 500
S-Band	100, 200, 300, 400, 500
C-Band	300, 400
X-Band	300, 400
Ku-Band	200, 250

Frequency Sub Band (GHz)			
L-Band		X-Band	
A	1.75 to 1.85	A¹	7.90 to 8.40
S-Band		Ku-Band	
A	2.02 to 2.12	A¹	14.00 to 14.50
B	2.20 to 2.30	B¹	13.75 to 14.50
G²	1.75 to 2.12		
C-Band			
A¹	5.850 to 6.425		
B¹	5.850 to 6.725		
C¹	5.750 to 6.670		

¹ Available with optional BUC
² Not available at 500W

GaN Device Designator	
G	GaN Device

Configuration Modifier 3	
X	None (Standard)
A	Side-Mount AC Input, Location 'A'
C¹	Side-Mount AC Input, Location 'B'

¹ Standalone units only

Configuration Modifier 2	
X	Standard
M	MS-Connector Covers
R¹	Receive Band Reject Filter
S¹	M + R (see above)
W²	Waveguide Pressure Window
Y²	M + W (see above)

¹ L-Band, S-Band and X-Band only

² Ku-Band standalone units only

Configuration Modifier 1	
X	Standard
K¹	110 VAC Input Power

¹ Available on all C-Band units, all X-Band units, Ku-Band units > 150W

System Configuration	
X	Standalone amplifier

Block Up Converter	
M	Internal Reference BUC
P	External Reference BUC
X	No BUC

Package	
C	Standalone amplifier

COMMENTS:

Global Sales Offices

U.S., Canada, Latin America

Teledyne Paradise Datacom
11361 Sunrise Park Drive
Rancho Cordova, CA 95742
Tel: +1 (814) 954-6163
sales@paradisedata.com

Eastern Regional Sales Office

(Eastern U.S. & Latin America)
RF Inquiries: John O'Grady, (848) 220-6464
Modem Inquiries: Mike Towner, (470) 509-9941
sales@paradisedata.com

Western Regional Sales Office

(Western U.S. & Canada)
Bruce Grieser
Cell: +1 (480) 444-9676
sales@paradisedata.com

U.K. Office

Europe, Middle East, Africa
Teledyne Paradise Datacom
106 Waterhouse Lane,
Chelmsford, Essex, England, CM1 2QU
Tel: +44(0)1245 847520
Tel: +44(0)1376 515636
sales@paradisedata.com

Asia Pacific

Tavechai Mektavepong
Teledyne Paradise Datacom Thailand Office
333, 20 C1 Fl., Lao Peng Nguan Tower 1,
Vibhavadi-Rangsit Rd.,
Chomphol, Chatuchak,
Bangkok 10900
Thailand

Tel: +66 2-272-2996
Fax: +66 2-272-2997
sales@paradisedata.com

Beijing, China

Teledyne Paradise Datacom Representative Office
Room 204, No.1 Building,
No.9 Jiuxianqiao East Road,
Chaoyang District,
Beijing, China 100016

Tel: +86 13601251528
sales@paradisedata.com

Use and Disclosure of Data: This product is classified as EAR99 and is subject to U.S. Department of Commerce regulations. Export, reexport or diversion contrary to U.S. law is prohibited.

Proprietary and Confidential: The information contained in this document is the sole property of Teledyne Paradise Datacom. Any reproduction in part or as a whole without the written permission of Teledyne Paradise Datacom is prohibited.

Data Security: Teledyne Paradise Datacom amplifiers and controllers do not inherently provide encryption to transmitted data, and have limited security measures to protect it. If the unit will be accessible over the Internet, exercise appropriate data security protocols. Teledyne Paradise Datacom strongly recommends placing the equipment behind a protective Firewall or setting up a VPN link with dual authentication for remote access.

Specifications are subject to change without notice.