



1.1 kW C-Band High Power SSPA

DESCRIPTION

Teledyne Paradise Datacom's Indoor, High Power Rack Mount (R) series SSPAs represent the industry's highest power density and most reliable high power amplifier systems. These high power amplifiers are accompanied with a separate 1RU power supply chassis.

The power supply is configured as a n+1 redundant, hot swappable power supply comprised of up to four modules. The power supply is populated with one module more than needed to power the HPA. In the event of a single power supply module failure, the amplifier system will not fail. The power supply module can be changed without ever taking the HPA out of service. The microwave amplifier architecture is also designed for maximum soft fail redundancy.

The High Power Rack Mount SSPA employs a modular design, which allows quick and easy replacement in the event of a catastrophic failure of one of the SSPA components. These modular assemblies include: front and rear fan trays; and a rear panel controller card.

FEATURES

- Extremely High Power Density:
to 1.1 kW C-Band;
to 1000W X-Band;
to 500W Ku-Band.
- Hot Swap, n+1 Redundant Power Supply
- Power Factor Corrected Power Supply
- Modular (soft-fail) Architecture
- Front Panel Touchscreen
- Removable fan assemblies
- Ethernet Port
- RF Output Sample Port
- Built-in 1:1 Redundancy Control
- Built-in Maintenance Switch Controller
- Hot/Cold Standby operating modes for reduced power consumption

OPTIONS

- Extended Frequency Band
- L-Band Input operation
- Reflected Power Monitor
- Phase Combined Systems
- Remote Control Panel
- RF Input Sample Port
- Rear Panel Exhaust

SPECIFICATIONS

- SSPA Chassis housing:
19.0 X 10.47 X 30.25 in
483 X 266 X 768 mm
180 lbs. / 82 kg
- 1RU Power Supply:
19.0 X 1.75 X 16.30 in
483 X 45 X 414 mm
33 lbs. / 15 kg
- Gray powder coat finish
- Operating temperature:
0 to +50 °C

Specifications, C-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "A"	5.850 to 6.425	GHz
	Frequency selection "B" ¹	5.850 to 6.725	GHz
	Frequency selection "C"	5.750 to 6.670	GHz
	Frequency selection "E"	6.425 to 6.725	GHz
	Frequency selection "F"	6.725 to 7.025	GHz
	Frequency selection "G"	5.750 to 6.475	GHz
Output Power Typical, P _{sat} Guaranteed minimum, P _{1dB}	HPAC6800ARXXXXP	P _{sat} / P _{1dB} 59.0 (800) / 58.0 (630)	dBm (W)
	HPAC6900ARXXXXP	59.5 (900) / 58.5 (700)	dBm (W)
	HPAC611KARXXXXP	60.4 (1100) / 60.0 (1000)	dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor	.98	
		47 to 63	Hz
	HPAC6800ARXXXXP	4150 (180 to 265)	W (VAC)
	HPAC6900ARXXXXP	4850 (180 to 265)	W (VAC)
	HPAC611KARXXXXP	6000 (180 to 265)	W (VAC)

Note 1: De-rate output power by 1 dB linearly from 6.425 to 6.725 GHz.

General Specifications: 6RU RM Series

PARAMETER	NOTES	LIMITS	UNITS
Gain	minimum	75	dB
Gain Flatness	full band	± 1.0	dB
	Extended C-Band units	± 1.5	dB
Gain Slope	per 40 MHz	± 0.3	dB/40 MHz
Gain Variation vs. Temperature	0 °C to +50 °C	± 1.0	dB
Gain Stability	at constant temperature	± 0.25	dB/24 hours
Gain Adjustment	0.1 dB resolution	20	dB
Intermodulation Distortion	3dB back off relative to P _{1dB}	-25	dBc
AM/PM Conversion	(@ rated P _{1dB})	3.5	°/dB
	(@ P _{1dB} - 3 dB)	0.5	°/dB
Spurious Harmonics	(@ rated P _{1dB})	-65	dBc
	(@ rated P _{1dB} - 3 dB)	-50	dBc
Input VSWR	(all bands and power levels)	1.30:1	
Output VSWR	(all bands and power levels)	1.50:1	
Noise Figure	at maximum gain	12	dB
Group Delay (per 40 MHz segment)	Linear	0.01	ns/MHz
	Parabolic	0.003	ns/MHz ²
	Ripple	1.0	ns p-p
Noise Output	TX Band	-75	dBW/4 KHz
	RX Band	-150	dBW/4 KHz
Output Isolation	@ full reflected power	25	dB
Residual AM Noise	0 - 10 KHz	-45	dBc
	10 KHz - 500 KHz	-20 (1.25 + log F)	dBc
	500 KHz - 1 MHz	-80	dBc
Phase Noise		IESS -308/309 - 10 dB	

Mechanical

Size			
HPA Chassis (6RU)	width X height X depth	19.0 X 10.47 X 30.25 483 X 266 X 768	inches mm
Power Supply Chassis (1RU)	width X height X depth	19.0 X 1.75 X 16.30 483 X 44 X 414	inches mm
Weight			
HPA Chassis		180 (82)	lbs.(kg)
Power Supply Chassis (1RU)	Chassis plus four (4) modules	33 (15)	lbs.(kg)
Finish		powder coat	Gray

Environmental

Operating Temperature	Ambient	0 to +50	°C
Operating Relative Humidity	Non-condensing	95	%
Operational Altitude	Above sea level	10,000 (3,048)	ft. (m)
Storage Temperature	Ambient	-20 to +75	°C
Storage Relative Humidity	Non-Condensing	90	%
Cooling System	Integrated	Forced air	

L-Band Operation

Teledyne Paradise Datacom amplifiers are available with an integrated L-Band Block Up Converter. L-Band units utilize Teledyne Paradise Datacom's proprietary zBUC technology. The addition of a zBUC® converter to the SSPA typically increases the gain by 2-4 dB. The advantages of zBUC technology include:

- zBUC converter can detect and switch to an externally supplied reference.
- Optional internal high stability (10MHz) reference.
- zBUC converter can lock to an externally supplied reference of 10 MHz or 50 MHz.
- zBUC converter can accept a wide range of external reference power (-10 to +5 dBm).


Available Frequency Plans

Band	Frequency Band	IF Input	LO Frequency	RF Output	Gain Change
C	Sub-Band "A"	950 - 1525 MHz	4.900 GHz	5.850 - 6.425 GHz	0-4 dB
C	Sub-Band "B"	950 - 1825 MHz	4.900 GHz	5.850 - 6.725 GHz	0-4 dB
C	Sub-Band "C"	950 - 1870 MHz	4.800 GHz	5.750 - 6.670 GHz	0-4 dB
C	Sub-Band "E"	950 - 1250 MHz	5.475 GHz	6.425 - 6.725 GHz	0-4 dB
C	Sub-Band "F"	950 - 1250 MHz	5.775 GHz	6.725 - 7.025 GHz	0-4 dB
C	Sub-Band "G"	950 - 1675 MHz	4.800 GHz	5.750 - 6.475 GHz	0-4 dB


Electrical Specifications for 6RU RM SSPA with ZBUC converter

PARAMETER	NOTES	LIMITS		UNITS
Gain	Nominal setting	75		dB
Gain Flatness	full band	± 2.0		dB
Gain Slope	per 40 MHz	± 0.5		dB/40 MHz
Gain Adjusted Range	Typical C-Band Adj. Range	20		dB
Gain Stability	-40 to +60 °C	60 - 80		dB
		± 1.5		dB
Phase Noise	Offset frequency from carrier	<u>Absolute max.</u>	<u>C-band (typ.)</u>	
	10 Hz	-30	-60	dBc/Hz
	100 Hz	-60	-74	dBc/Hz
	1 KHz	-70	-84	dBc/Hz
	10 KHz	-80	-100	dBc/Hz
	100 KHz	-90	-105	dBc/Hz
	1 MHz	-90	-125	dBc/Hz
Spurious	In-Band Signal Related (C-Band) (Extended C-Band)	-50		dBc
	Close to Carrier Spurious (≤ 20 MHz)	-40		dBc
	Local Oscillator	-50		dBc
		-30		dBm
Noise Figure	At Maximum gain	20		dB
Transmit Band Noise Output Power Density	Tx Band at Maximum gain	-65		dBW/4kHz
Input VSWR	L-Band	1.5 : 1		
Internal Reference Option	Reference Accuracy (initial)	± 1 • 10 ⁻⁸		
	Aging per day (after 30 days)	± 1 • 10 ⁻⁹		
	Aging per year (after 30 days)	± 6 • 10 ⁻⁸		
	Reference Stability over Temperature (-40 to +40 °C, ambient)	± 1 • 10 ⁻⁸		

6RU Rack Mountable GaAs Solid State Power Amplifier

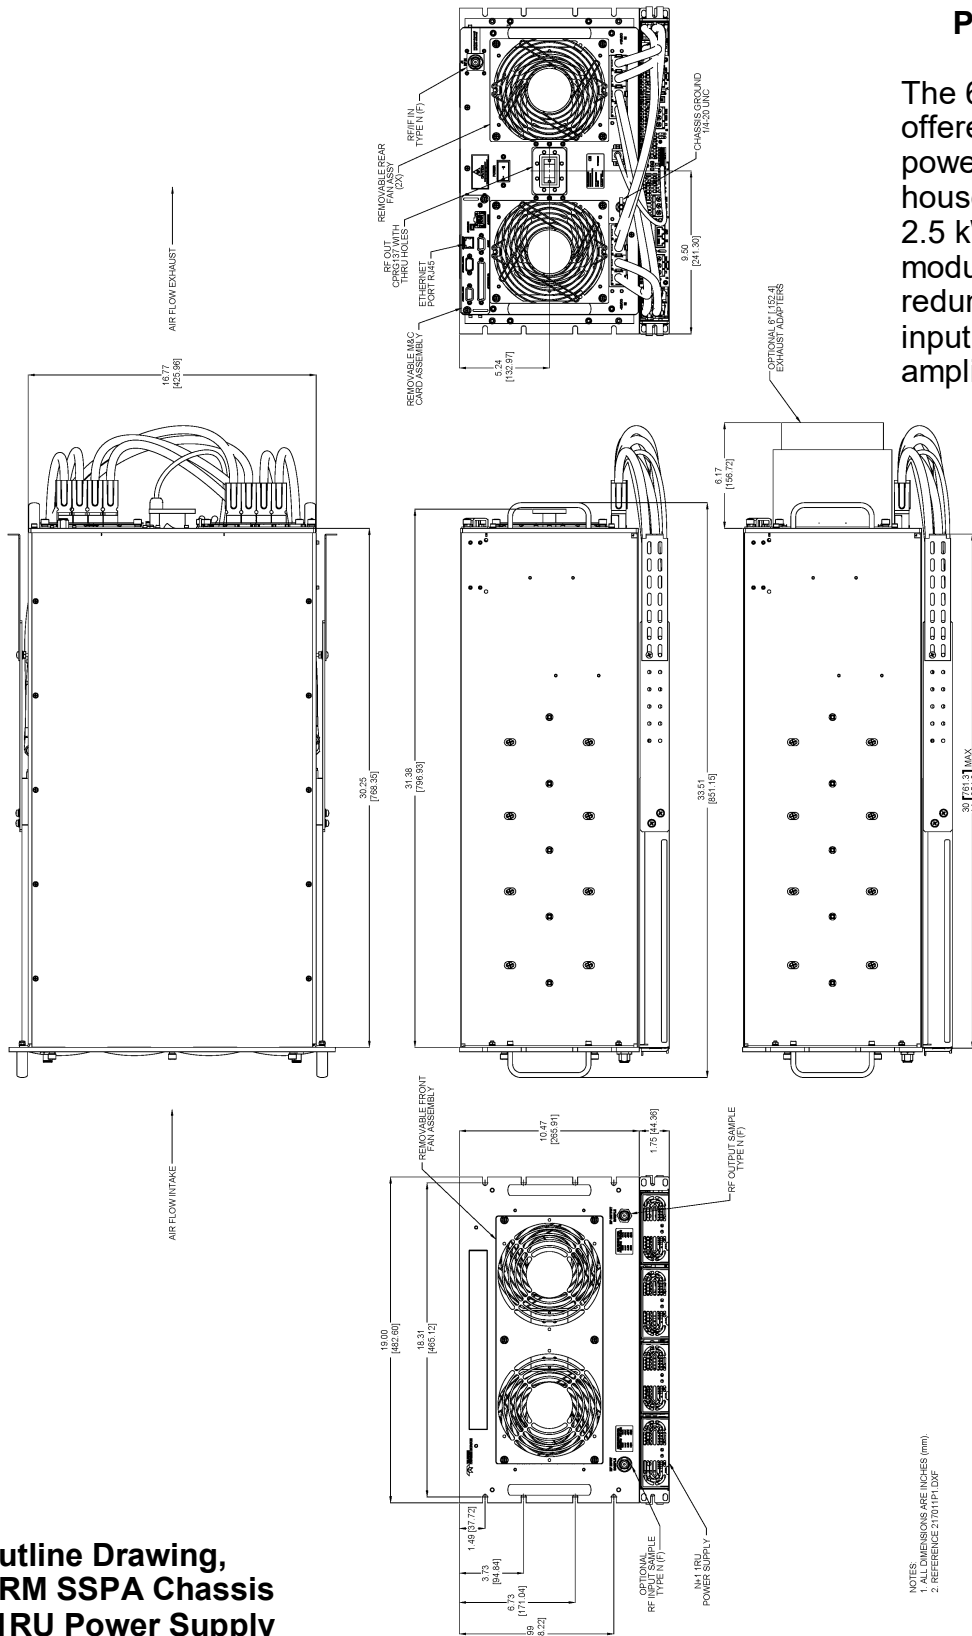

Part Number Configuration Matrix

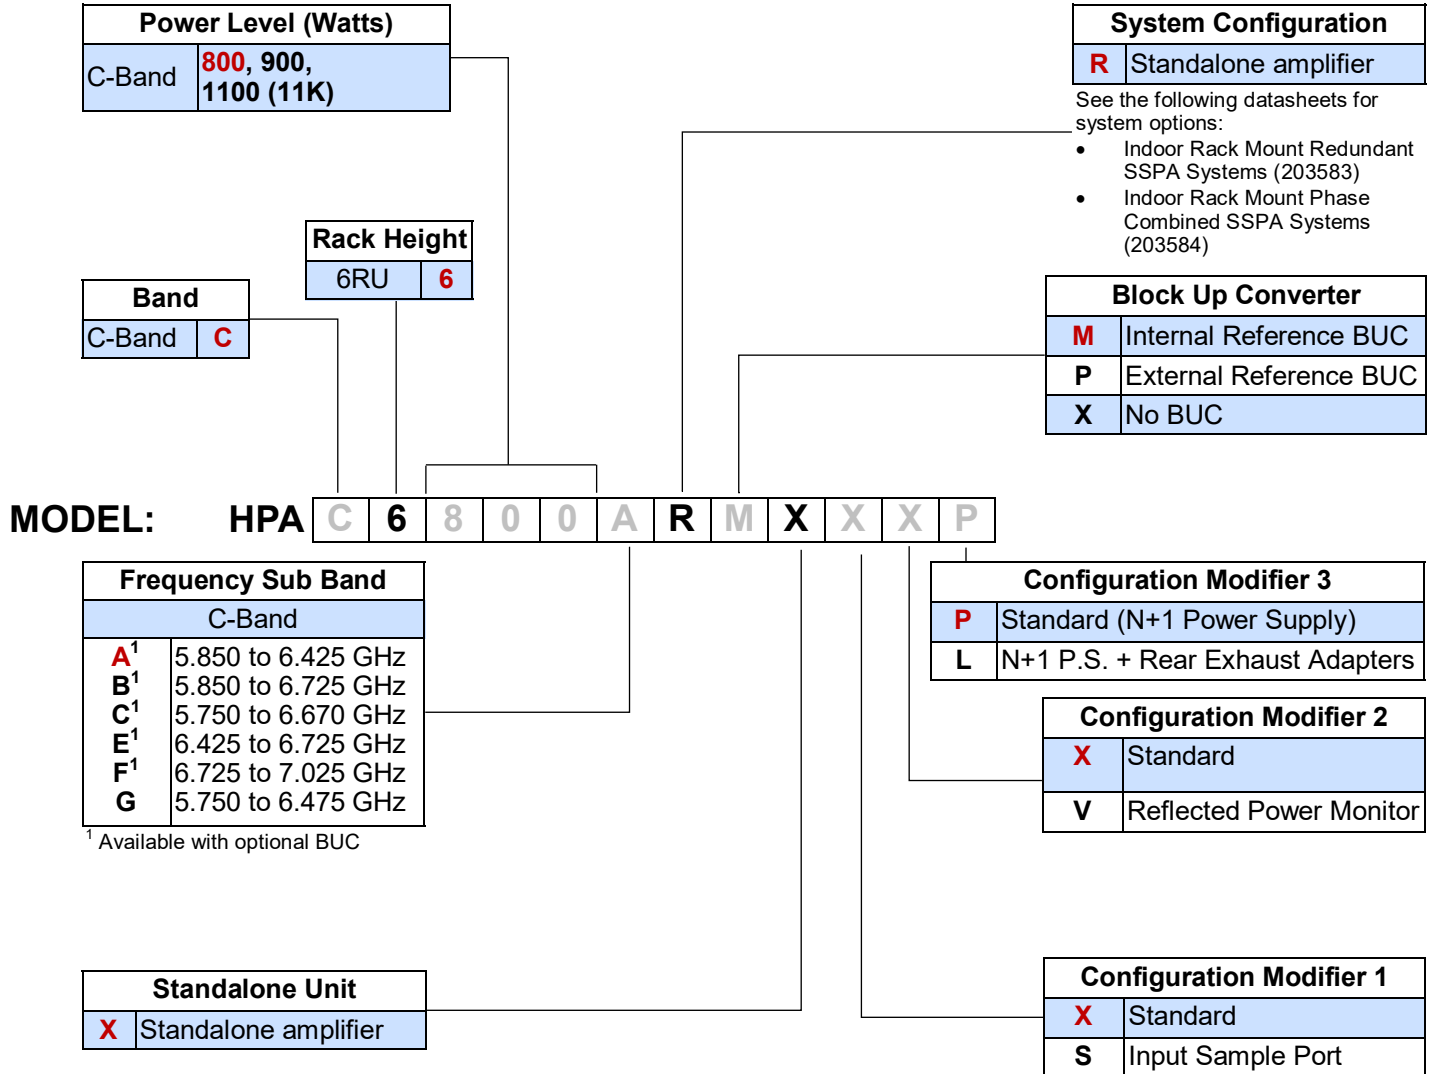

Example - A standalone 800W GaAs C-Band 6RU Rack Mount SSPA with standard N+1 external power supply and an optional internal reference block up converter is part number: **HPAC6800ARMXXXP**.

COMMENTS:

Global Sales Offices

U.S., Canada, Latin America

Teledyne Paradise Datacom
11361 Sunrise Park Drive
Rancho Cordova, CA 95742
Tel: +1 (814) 954-6163
sales@paradisedata.com

Eastern Regional Sales Office

(Eastern U.S. & Latin America)
RF Inquiries: John O'Grady, (848) 220-6464
Modem Inquiries: Mike Towner, (470) 509-9941
sales@paradisedata.com

Western Regional Sales Office

(Western U.S. & Canada)
Bruce Grieser
Cell: +1 (480) 444-9676
sales@paradisedata.com

U.K. Office

Europe, Middle East, Africa
Teledyne Paradise Datacom
106 Waterhouse Lane,
Chelmsford, Essex, England, CM1 2QU
Tel: +44(0)1245 847520
Tel: +44(0)1376 515636
sales@paradisedata.com

Asia Pacific

Tavechai Mektavepong
Teledyne Paradise Datacom Thailand Office
333, 20 C1 Fl., Lao Peng Nguan Tower 1,
Vibhavadi-Rangsit Rd.,
Chomphol, Chatuchak,
Bangkok 10900
Thailand

Tel: +66 2-272-2996
Fax: +66 2-272-2997
sales@paradisedata.com

Beijing, China

Teledyne Paradise Datacom Representative Office
Room 204, No.1 Building,
No.9 Jiuxianqiao East Road,
Chaoyang District,
Beijing, China 100016

Tel: +86 13601251528
sales@paradisedata.com

Use and Disclosure of Data: This product is classified as EAR99 and is subject to U.S. Department of Commerce regulations. Export, reexport or diversion contrary to U.S. law is prohibited.

Proprietary and Confidential: The information contained in this document is the sole property of Teledyne Paradise Datacom. Any reproduction in part or as a whole without the written permission of Teledyne Paradise Datacom is prohibited.

Data Security: Teledyne Paradise Datacom amplifiers and controllers do not inherently provide encryption to transmitted data, and have limited security measures to protect it. If the unit will be accessible over the Internet, exercise appropriate data security protocols. Teledyne Paradise Datacom strongly recommends placing the equipment behind a protective Firewall or setting up a VPN link with dual authentication for remote access.

Specifications are subject to change without notice.