

# AXIOM-N

IP-Centric Rack-Mount Satellite Modem



A Compatible Member  
of the Paradise Modem Family

## Overview

The AXIOM-N is our most powerful satellite modem to date, designed to provide exceptional performance and reliability for your IP centric networks. The availability of higher order modulations makes the AXIOM-N ideal to support new HTS satellites, so future proofing your investment.

Features include:


- **High capacity:** IP-centric, DVB-S2X, options up to 345Mb/s Tx, 230Mb/s Rx
- **Secure:** SCPC is more secure than TDMA, and provides guaranteed bandwidth for always-on applications.
- **Compatible with Q & AXIOM products**
- **Enhanced Doppler:** Superior performance for LEO and MEO communications with an allowable frequency shift of up to  $\pm 700\text{kHz}$  and rate of change up to  $\pm 100\text{kHz/s}$
- Star remote node in a **Point-to-Multipoint** system, with an QMultiFlex-400 Hub or **Point-to-Point** with AXIOM or Q Series Modems.



The AXIOM-N (above) compared to the Paradise Q-Series rack-mount modem

## Markets & Applications


- Broadband Internet access / rural Internet access
- VoIP networks
- Wi-Fi hotspots
- Small Office / Home Office
- SME
- Ship crew / passenger entertainment
- Internet of things
- Enterprise / corporate networks

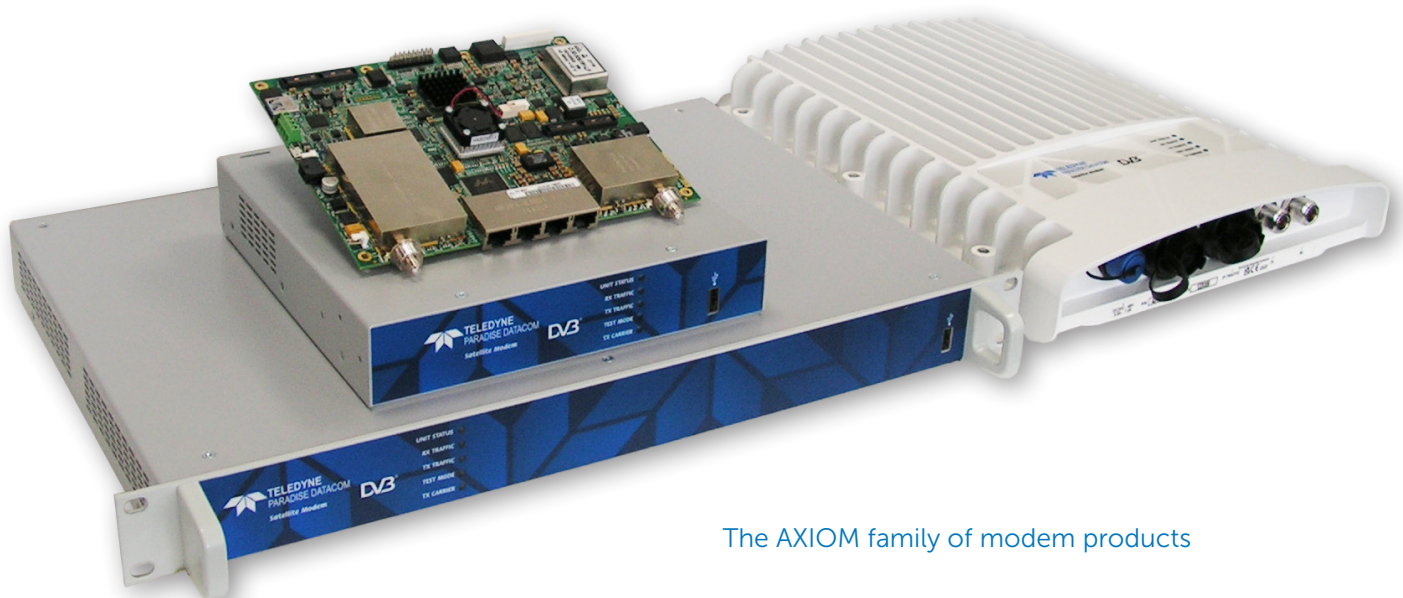


The AXIOM family of modem products

## New Web User Interface

The AXIOM-N M&C is via an intuitive Ethernet based web browser ideally suited to use on a tablet, Mobile or laptop PC and allows the user to install, configure and monitor the Modem with ease. In addition, WiFi capability provided by a Paradise supplied pluggable USB Dongle further enhances the ease of use and provides greater flexibility for remote control and installation using portable devices.

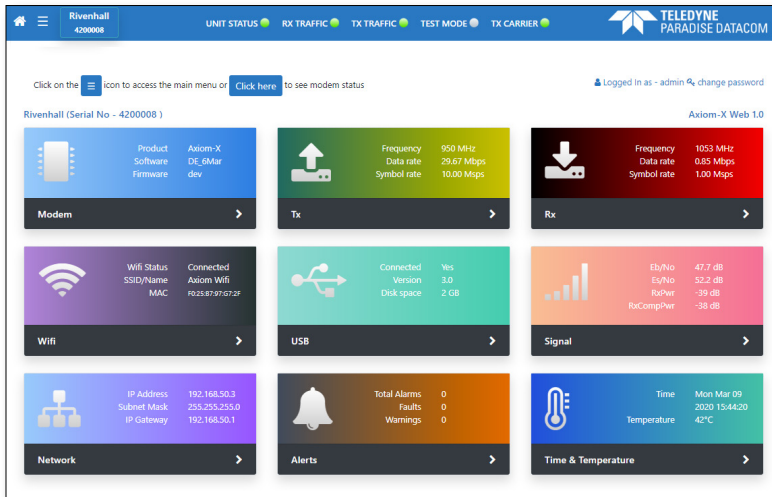


Clear, Intuitive Home views allows easy, one click navigation direct to the required fields

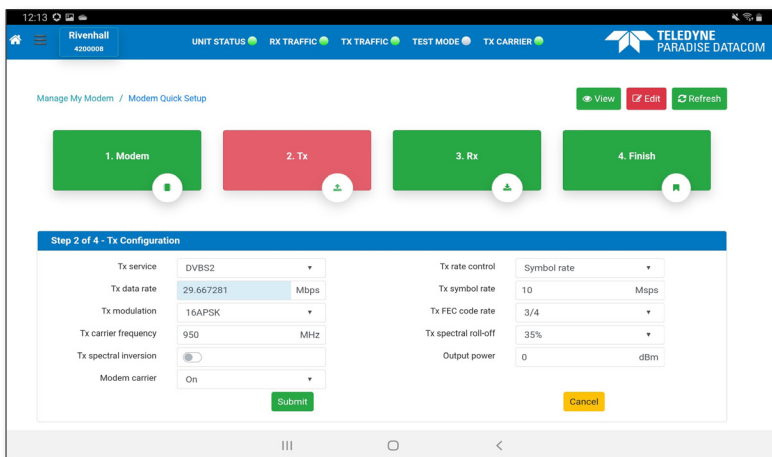


Easy flow configuration allowing quick set-up of key parameters (upper)

Network tree overview (lower)

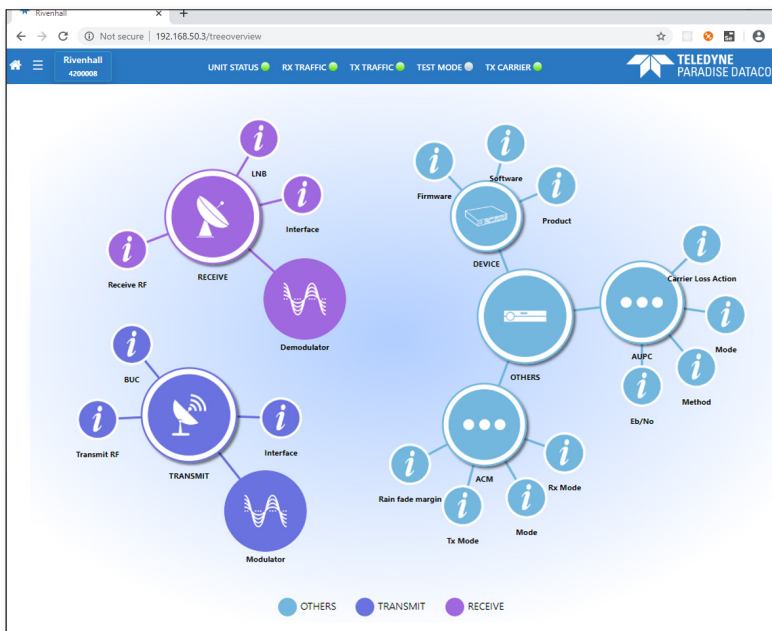

Tablet view allowing easy on the move Browsing

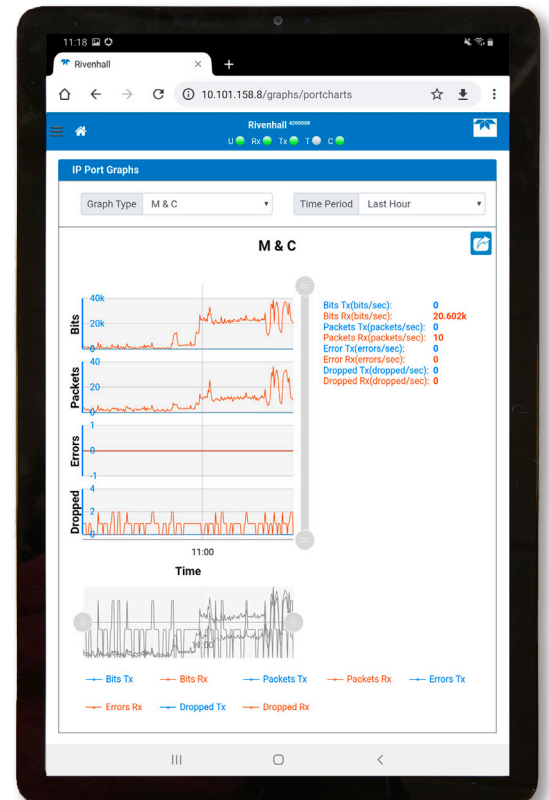

# Built for the Most Stringent Portable Applications

## SECURE

- SCPC is both secure, and with Paradise Modems, easy to provision
- For enhanced security, a model is available with AES-256 encryption built in

## COMPATIBLE

- Reuse your existing code
- No need for extensive retraining of maintenance staff

## STATE OF THE ART

- DVB-S2X up to 256APSK provides the highest bandwidth efficiency
- Advanced compression and acceleration features optional
- Ideal for use with constellations

## CONVENIENT

BUC power supply can be provided by the standard 24V DC input, reducing the need for external equipment



## WELL EQUIPPED

### Transmitter

Fast: Up to 345 Mbps, 100Msps  
Output power 0 to -40dBm

### 4 Gigabit Ethernet Ports

Convenient – no need for an external switch, saving space, power, wiring;  
Layer 2 Bridging, Layer 3 Routing

### Receiver

Fast: Up to 230Mbps, 98Msps

### RF Stages

- Future Proof: Transmit and receive speeds upgradable in the field – only pay for the capacity you need now
- L-band coverage from 950 to 2,150 MHz



## Main Specifications

Topology	Point to Point or Star Modem within a Point to Multipoint Network
Standard	<b>DVB-S2:</b> (EN 302 307-1) (Supports all DVB-S2 & DVB-S2X MODCODs including Linear MODCODs) <b>DVB-S2X:</b> (EN 302 307-2)
Frequency	<b>L-band:</b> 950 to 2150MHz (resolution 1Hz)
Data Rates	<b>Standard:</b> 2,048kbps (Tx); up to 230Mbps (Rx) <b>Tx Options:</b> 5Mbps, 10Mbps, 25Mbps, 100Mbps, & 345Mbps
Data Rate Limits	<b>DVB-S2/S2X:</b> Up to 345Mbps Tx & 230Mbps Rx
Tx Symbol Rate Limits	<b>DVB-S2/S2X:</b> 90ksps to 100Msps
RX Symbol Rate Limits	<b>DVB-S2/S2X:</b> 90ksps to 98Msps (98Msps@QPSK, 85Msps@8PSK/8APSK, 64Msps@16APSK, 51Msps@32APSK, 43Msps@64APSK, 36Msps@128APSK, 32Msps@256APSK)

## Router Specifications

Network Support	Layer 2 Bridging, Layer 3 Routing, Jumbo Frames to 10k bytes, 160k pps <b>Trunking Mode:</b> Supporting 230 Mbps bi-directional traffic at up to 350k pps, each way.
Management	HTTP/S Web Server, SNMP v1, v2c & v3, AAA RADIUS Secure User Login & Access Control Lists, SSH
Protocols	IPv4/IPv6, IEEE 802.1q /p VLAN support, Software Defined Network Support, NAT, DHCP, Network Time Protocol (NTP), sFlow Performance Metrics, Active Queue Management (AQM), MPEG over IP, OpenAMIP Protocol Support, Inter VLAN Routing Support with Virtual Routing & Forwarding
Advanced IP Features	Robust Header Compression (RFC 3095), Payload Compression, Dynamic Routing (RIP V1, V2; OSPF V2, V3; BGP V4), TCP Acceleration
DVB Features	ACM/VCM, DVB Encapsulation, GSE Encapsulation

## Interface, Mechanical and Environmental Specifications:

Traffic	4-port Gigabit Ethernet switch (RJ45 connectors; Interface used for IP traffic and M&C)
IF Tx and Rx	L-band: 950 to 2,150MHz (resolution 1Hz) SMA connectors
Power Supply	90 to 264VAC, 1A @ 100V, 0.5A @240V, 47 to 63Hz, Fused, IEC Connector (live and neutral fused) or wide range floating DC input Voltage: 24V to 48V, 9A @ 24V, 4.5A @ 48V, power consumption 30W max (modem only), 200W max (including BUC PSU). Unit is supplied with a DC plug for customer power supply connection

## Modulator Specifications

Modulator	<b>DVB-S2:</b> QPSK, 8PSK & 16APSK <b>DVB-S2X:</b> QPSK, 8PSK, 8APSK-L 16APSK, 16APSK-L, 32APSK, 32APSK-L, 64APSK & 64APSK-L <b>Options for Advanced Modulation:</b> 128APSK, 256APSK and 256APSK-L
Output Power	0 to -40dBm (950 to 2,150MHz)
Transmit Filter Roll-off	<b>DVB-S2:</b> 20%, 25%, 35% <b>DVB-S2X:</b> 5%, 10%, 15%, 20%, 25%, 35%
Harmonics & Spurious	Better than -55dBc/ 4kHz in-band (at 0dBm to -30dBm output)
BUC PSU Option	Allows the 24V DC input power to be used to power a BUC via the Interfacility Link (IFL) (6A Max)
BUC 10MHz Reference	Via IFL cable; 10MHz $\pm$ 0.01 ppm; 2dBm $\pm$ 2dBm
QoS	Provides guaranteed throughput for priority traffic; supports Committed and Burst Information Rates. Stream classification by VLAN ID, IP address, IEEE 802.1p priority, Diffserv DSCP, & MPLS EXP

## Demodulator Specifications








Demodulator	<b>DVB-S2:</b> QPSK, 8PSK & 16APSK <b>DVB-S2X:</b> QPSK, 8PSK, 8APSK-L 16APSK, 16APSK-L, 32APSK, 32APSK-L, 64APSK & 64APSK-L <b>Options for Advanced Modulation:</b> 128APSK, 256APSK and 256APSK-L
Enhanced Doppler	<b>Frequency shift:</b> up to $\pm$ 700kHz; <b>rate of change</b> up to $\pm$ 100kHz/s (symbol rate dependent)
Receive Filter Roll-off	<b>DVB-S2:</b> 20%, 25%, 35% <b>DVB-S2X:</b> 5%, 10%, 15%, 20%, 25%, 35%
Input Range	<b>Minimum:</b> -140 + 10 log (symbol rate) <b>Maximum:</b> -78 + 10 log (symbol rate)
LNB Voltage	Selectable 13V, 15V, 18V or 20V DC to LNB via IFL cable; maximum 0.5A

## Comparing AXIOM-N to QFlex-400

Specification	AXIOM-N	QFlex-400
Data Rate	Tx: 345 Mbps Rx: 230 Mbps	345 Mbps
Symbol Rate	<b>Tx: 100 Msps Rx: 98 Msps</b> <sup>[1]</sup>	70 Msps
Modulation	DVB-S2X up to 256APSK	DVB-S2X up to 256APSK
RF Frequency Range	L: 950 to 2,150 MHz	IF: 50 to 180 MHz L: 950 to 2,450 MHz
RF Tx Power Range	L: 0 to -40 dBm	IF: 0 to -25 dBm L: +5 to -40 dBm (950 to 1,950 MHz) 0 to -40 dBm (1,950 to 2,150 MHz) 0 to -30 dBm (2,150 to 2,450 MHz)
RF Connector	N-type	N-type
PCMA Bandwidth	-	72 MHz
Display & Keypad Entry	-	Yes
Terrestrial Interface Slots	-	Choice of Two
Available WGS-Certified Models?	-	Yes
Available Encrypted Models?	Yes	Yes, optional TRANSEC
Ethernet M&C/ Traffic Ports	1 M&C, 3 Traffic	IP: 1 M&C, 3 Traffic
Size	1U chassis, 285mm deep excluding front panel handles and rear panel connectors and fans	1U chassis, 285mm deep excluding front panel handles and rear panel connectors and fans
PSU	90 to 264VAC, 1A @100V, 0.5A @240V, 47 to 63Hz Fused IEC connector (live and neutral fused)	90 to 264VAC, 1A @100V, 0.5A @ 240V or 24V DC option

[1] 98Msps@QPSK, 85Msps@8PSK/8APSK, 64Msps@16APSK, 51Msps@32APSK, 43Msps@64APSK, 36Msps@128APSK, 32Msps@256APSK

## The Paradise Family of Secure SCPC Modems

Paradise SCPC Modems			Point-to-Point	Mesh	Point-to-MultiPoint, Star, Hybrid		Features of Note
					Hub	Remote Site	
Standard	1U 19" Rack	QFlex-400	✓			✓	PCMA+ enhanced carrier overlay available
		QMultiFlex-400	✓	✓	✓	✓	Optional Embedded Hub Canceller
		QFlex-400 P2MP	✓			✓	Configured remote
		QubeFlex	✓				Small Sat/LEO - support for CCSDS
		AXIOM-N	✓			✓	IP-centric modem 
Small Form Factor	Rack Mount Half Width	Q-Lite Half Width	✓			✓	Mountable side-by-side in 1U rack space 
		AXIOM-C	✓			✓	Compact IP-centric modem 
	Rugged	Q-Lite Rugged	✓			✓	IP65 weatherproof outdoor modem 
		AXIOM-R	✓			✓	IP67 IP-centric modem 
	OEM Card	Q-Lite Card	✓			✓	For OEM integration 
		AXIOM-X	✓			✓	Our smallest modem 

All modem models except QubeFlex are also available as **encrypted models**, capable of TCP/IP packet payload encryption using symmetric AES with 256-bit keys. Note that these models are export controlled.


## Ordering: AXIOM-N

Standard Features	Description
	<input checked="" type="checkbox"/> <b>100kbps to 2.048Mbps DVB-S2 CCM/ACM (EN 302 307-1) Modem</b> , Supporting QPSK, 8PSK & 16APSK, 20%, 25% & 35% Roll off, with <b>4-port Gigabit Ethernet switch for M&amp;C and traffic;</b> <b>L-band</b> operation 950 to 2,150MHz <b>AUPC:</b> Automatic Uplink Power Control <b>Traffic Shaping:</b> Supports CIR/BIR/priority settings for IP streams classified by IP address, Diffserv class, IEEE 802.1p priority tag, MPLS EXP field, and VLAN ID <b>Dynamic Routing:</b> RIP, OSPF and BGP

### Optional Features

Extend Tx Data Rate	<input type="checkbox"/> <b>5Mbps:</b> Extends base operation to 5Mbps
	<input type="checkbox"/> <b>10Mbps:</b> Extends 5Mbps operation to 10Mbps
	<input type="checkbox"/> <b>25Mbps:</b> Extends 10Mbps operation to 25Mbps
	<input type="checkbox"/> <b>100Mbps:</b> Extends 25Mbps operation to 100Mbps
	<input type="checkbox"/> <b>345Mbps:</b> Extends 100Mbps operation to 345Mbps
Add Advanced IP Features	<input type="checkbox"/> <b>Compression:</b> IP/UDP/TCP/RTP packet header compression (RFC 3095) plus Ethernet header compression; TCP/UDP packet payload compression using the Deflate algorithm (RFC 1951)
	<input type="checkbox"/> <b>Acceleration:</b> Up to 10,000 concurrent accelerated TCP connections to 100Mbps subject to prevailing data rate limits
DVB-S2X	<input type="checkbox"/> <b>DVB-S2X CCM, ACM, VCM:</b> QPSK, 8PSK, 8APSK, 16APSK, 32APSK & 64APSK Tx/Rx operation per EN 302 307-2. Includes 5%, 10%, 15%, 20%, 25% & 35% spectral roll-offs. Includes DVB features; ACM, VCM and DVB encapsulation. To 345/230Mbps subject to prevailing modem data rate limits.
	<input type="checkbox"/> <b>Advanced Modulation:</b> 128APSK, 256APSK, 256APSK-L
BUC	<input type="checkbox"/> Enable <b>BUC</b> PSU software feature to provide DC via the IFL to power a BUC. 6A Max at 24V supplied via the Modem PSU. Requires <b>DC</b> power option.
Power Supply	<input type="checkbox"/> <b>AC:</b> 90 to 264VAC, 1A @ 100V, 0.5A @ 240V, 47 to 63Hz, Fused, IEC Connector (live and neutral fused)
	<input type="checkbox"/> <b>DC:</b> 24 to 48VDC, 9A @ 24V, 4.5A @ 48V, required for use with <b>Enable BUC PSU</b> option
AC Power Cord Select one if AC Power Supply option is selected	<input type="checkbox"/> <b>UK</b> <input type="checkbox"/> <b>US</b> <input type="checkbox"/> <b>EU</b> <input type="checkbox"/> <b>Australia</b>

## Global Sales Offices

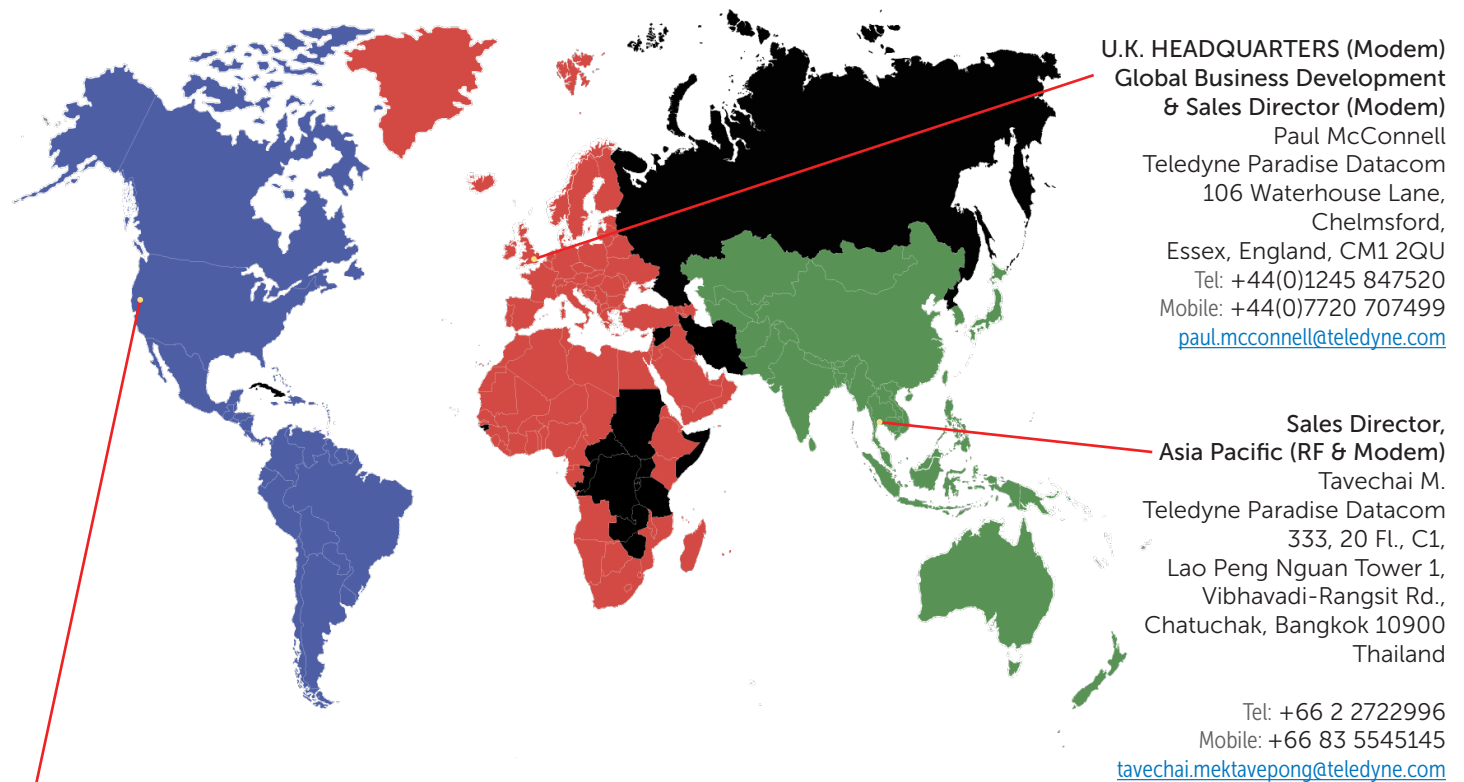

**U.S. HEADQUARTERS (RF)**  
Teledyne Paradise Datacom  
11361 Sunrise Park Drive  
Rancho Cordova, CA 95742  
[sales@paradisedata.com](mailto:sales@paradisedata.com)

**Global Business Development & Sales Director (RF)**  
Timothy Sheerin, (508) 273-5902  
[timothy.sheerin@teledyne.com](mailto:timothy.sheerin@teledyne.com)

**Sales Director, Eastern U.S. & Latin America (RF)**  
John O'Grady, (848) 220-6464  
[john.ogrady@teledyne.com](mailto:john.ogrady@teledyne.com)

**Sales Director, Western U.S. & Canada (RF & Modem)**  
Bruce Grieser, (480) 444-9676  
[bruce.grieser@teledyne.com](mailto:bruce.grieser@teledyne.com)

**U.K. HEADQUARTERS (Modem)**  
**Global Business Development & Sales Director (Modem)**  
Paul McConnell  
Teledyne Paradise Datacom  
106 Waterhouse Lane,  
Chelmsford,  
Essex, England, CM1 2QU  
Tel: +44(0)1245 847520  
Mobile: +44(0)7720 707499  
[paul.mcconnell@teledyne.com](mailto:paul.mcconnell@teledyne.com)

**Sales Director, Asia Pacific (RF & Modem)**  
Tavechai M.  
Teledyne Paradise Datacom  
333, 20 Fl., C1,  
Lao Peng Nguan Tower 1,  
Vibhavadi-Rangsit Rd.,  
Chatuchak, Bangkok 10900  
Thailand  
  
Tel: +66 2 2722996  
Mobile: +66 83 5545145  
[tavechai.mektavepong@teledyne.com](mailto:tavechai.mektavepong@teledyne.com)



Teledyne Paradise Datacom reserves the right to change specifications of products described in this document at any time without notice and without obligation to notify any person of such changes.

Refer to the website or contact Sales or Customer Support for the latest product information. The information contained herein is classified EAR99 under the U.S. Export Administration Regulations. The modem itself is classified ECCN 5A991.b.4 and is subject to U.S. Department of Commerce export control. Export re-export or diversion contrary to U.S. law is prohibited.